


TECNOIL EVOLUTION 2019-2020





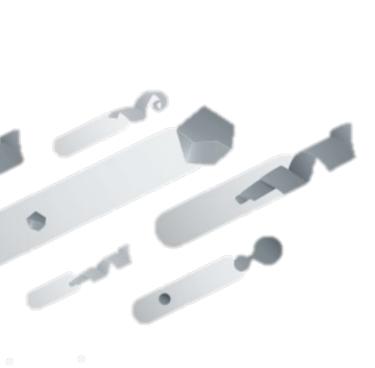

TECNOIL

Delfin holds dear customers' feedbacks and constantly aims at improving its products.

The oil and chips range has always been one of Delfin Best sellers, especially for its sturdiness, efficiency and quality.

RANGE BENEFITS

Quick and effective maintenance of machine tools

Financial savings

- ✓ Oil recycling
- ✓ Cost reduction with regard to exhausted oil disposal

Time savings

- ✓ The time spent on machine tools cleaning operations is reduced up to 60%.
- ✓ Machine downtimes are reduced













TC220 MPI



TC220 IF





TC400 IF

TC600



TC100 MPI





TECNOIL 2020





TC100 MPI







TC100 MPI

NEW FEATURES

Submersible pump with non-return valve

Discharge hose with Camlock connection


300 micron PPL filter as standard, placed inside the basket

Motor-head with 3 motors

No flux inversion

ADVANTAGES / BENEFITS


- Faster liquids discharge (140 lt/min)
- Simultaneous suction and discharge
- Aesthetic improvement and better sealing
- Oil filtration up to **300 micron**
- **Higher performances**





TC220 MPI







TC220 MPI

TC200 IF 3M

NEW FEATURES

Square tank with **220 liters capacity**

Submersible pump with non-return valve

300 micron PPL filter as standard, placed inside the basket

Motor-head with 3 motors

No flux inversion

Stainless steel inspection door in order to facilitate cleaning operations inside the tank

ADVANTAGES / BENEFITS

- +10% capacity compared to the previous version
- Faster liquids discharge (140 lt/min)
- Simultaneous suction and discharge
- Oil filtration up to **300 micron**
- **Higher performances**
- Easy access to the tank for cleaning operations







TC200 IF



TC220 IF



TC220 IF

NEW FEATURES

Square tank **220 liters capacity**

300 micron PPL filter as standard, placed inside the basket

Stainless steel inspection door in order to facilitate cleaning operations inside the tank

ADVANTAGES / BENEFITS

- +10% capacity compared to the previous version
- Oil filtration up to **300 micron**
- Easy access to the tank for cleaning operations






CAMLOCK CONNECTION

MODELS 100MPI, 220MPI



Better sealing for liquid discharge

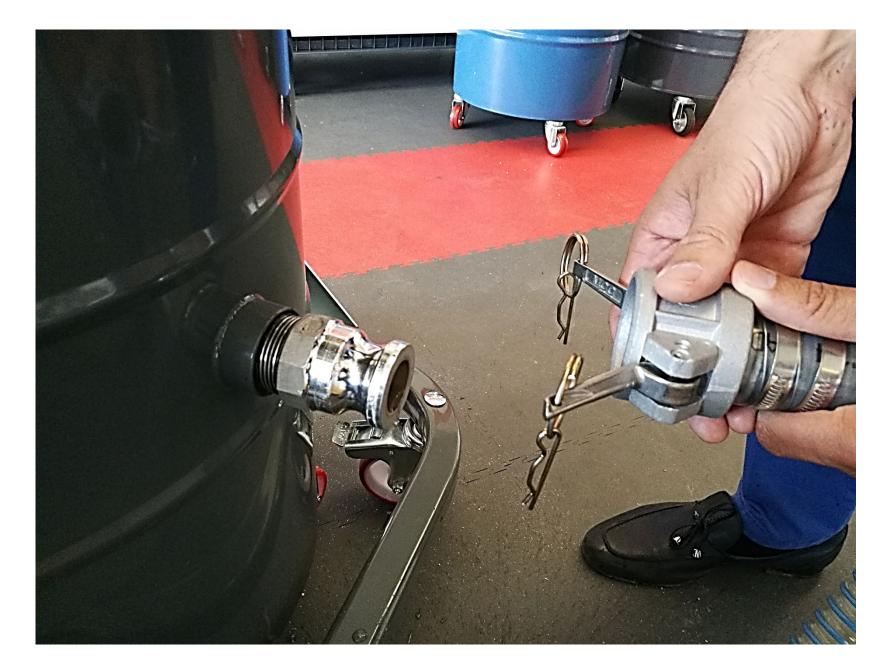

Easy to detach






SUBMERSIBLE PUMP MODELS 100MPI, 220MPI



Discharge pump 140 lt/min




Automatic discharge maximum level is detached by a level sensor






POLYPROPYLENE FILTER MODELS 100MPI, 220MPI, 220IF

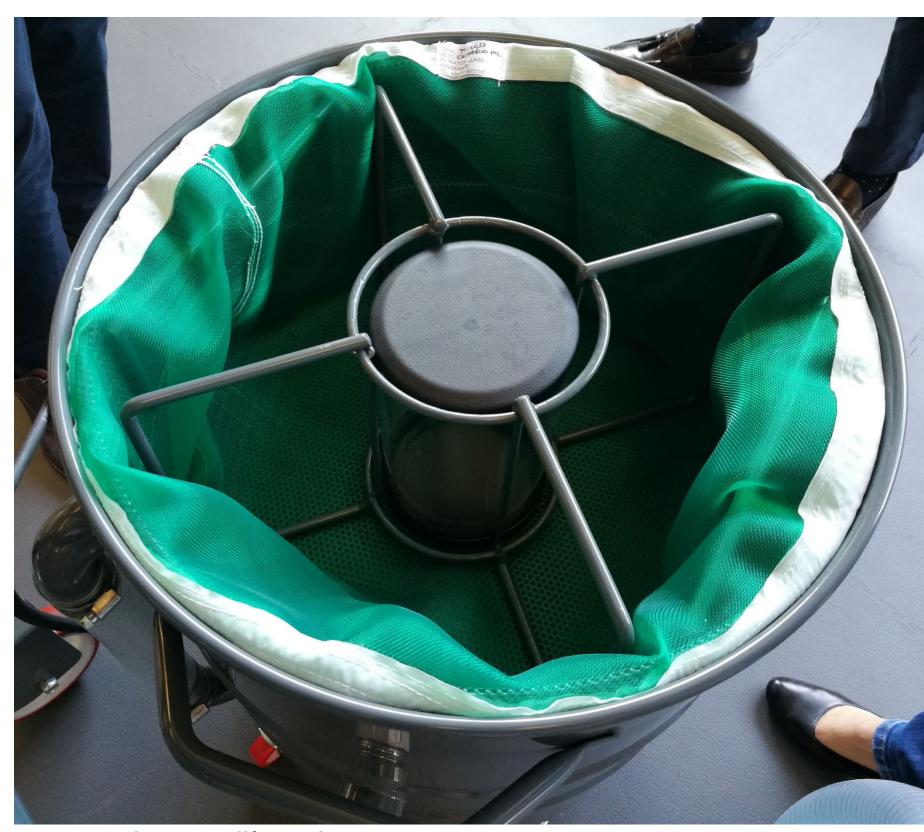

300 micron filtration





INSPECTION DOOR MODELS 220MPI, 220IF

Stainless steel inspection door in order to check and facilitate cleaning operations inside the tank